



LTC Bollard Light



✓ Technical Data

» Items Codes for 4000K:	112235	112264
	14W, 4000K	24W, 4000K
» Power Consumption (±5%):	14W	24W
» Input Voltage:	240V AC 50Hz	
» Power Factor:	>0.9	
» Surge Protection:	1kV line-line	
» Driver Type:	Constant Current (CC)	
» Control:	DALI, 1-10V Dimming (Optional)	

🌀 Optical Information

» LED Type:	LED 3030	
» Luminous Flux (±5%):	1,260lm	2,160lm
» Efficacy (5000K Ra70):	90lm/W	
» Correlated Color Temperature:	4000K (3000K & 5000K Optional)	
» Color Rendering Index:	Ra80	
» Beam Angle:	R03201, Type V (R03202. Type IV optional)	







Other Technical Parameters

Product Dimension:	$\phi 165 \times 900 \text{mm}$	($\phi 6.5" \times 35.43"$)
Luminaire Net Weight:	$7 \pm 0.3 \text{kg}$	($15.43 \pm 0.66 \text{Lbs}$)
Mounting Option:	Mounting kit with anchor bolts	
Material:	Aluminum Alloy Polycarbonate Optical Lens	
Finish:	Black Powder Coated	
EPA:	1.07	1.92
IK Rating:	IK10	
IP Rating:	IP66	
Operating Temperature:	-30°C to $+50^{\circ}\text{C}$ (-22°F to 122°F)	

Dimensions

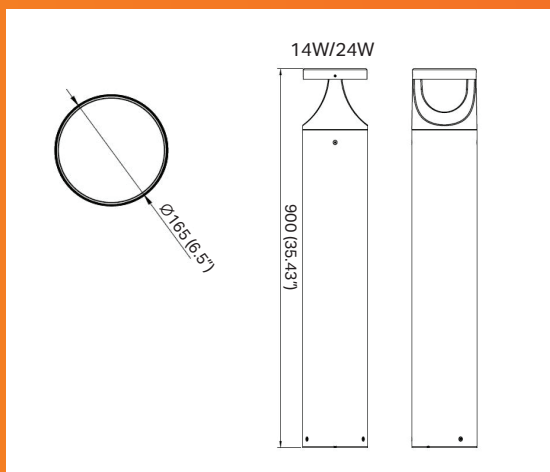


Photometry

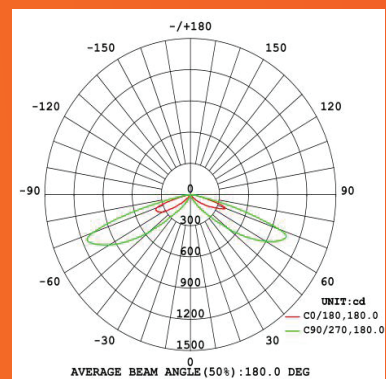

R03201

Installation

Mounting kit with anchor bolts



Accessories



Visor (Optional Extra)



Contact Us

LTC Head Office:

Sales: 1300 832 372

Email: sales@lighttc.com.au

Website: www.lighttc.com.au



Address:

251 Rawson Street,
Auburn, NSW 2144, Australia