


STEALTH FLOOD 1 (G1)
External Lighting

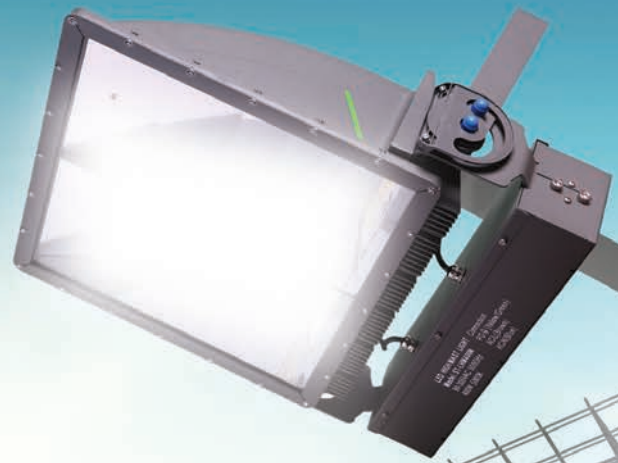

Product Overview

Stealth Flood with sturdy design & unique light distribution delivers both quality lighting with energy efficiency & longevity.

- Light output: Up to 104,000Lm
- Efficacy: 130 Lm/W
- IP66 Rating
- Thermal rating: 50°C
- Integral LED driver
- Up to 20kV surge protection
- Daylight sensor (optional)



Product Applications

- General flood light applications
- Various sport fields
- Stadiums
- Sea port
- Rail yard
- Airport
- Car parks
- Ferries
- Various public and commercial spaces
- And many more external lighting application.

- Stealth flood with unrivaled asymmetric light distribution system
- High pressure cast Aluminium housing: Gray finish
- Standard warranty: 5 years *
- Ease of installation & maintenance free
- Sturdy design to survive in adverse conditions





Main Features

Product Name:	Stealth Flood 1 (G1)
AC Input:	100-277 V AC , 50/60Hz
CRI Range:	CRI 80 (CRI 70 optional)
CCT Range:	5000K (3000K, 4000K optional)
Luminous flux:	39,000Lm (300W) 52,000Lm (400W) 65,000Lm (500W) 78,000Lm (600W) 104,000Lm (800W)
Power options:	100W to 800W
Light distribution:	Indirect asymmetric
Control system:	Dali, 1-10V dimming (optional)
Accessories:	IP66 Junction box, Asymmetrical louvre, cable connector, protective metal wire guard etc.

Stealth Flood Options

Stealth Flood is a one to one replacement for existing HID flood light with up to 65% energy savings.



Contact Us

LTC Head Office:

Sales: 1300 832 372

Email: sales@lighttc.com.au

Admin: 1300 832 372

Email: admin@lighttc.com.au

Website: www.lighttc.com.au



Address:

251 Rawson Street,
Auburn, NSW. 2144. Australia.