

STEALTH FLOOD 1 (G3) External Lighting



Product Overview

Stealth Flood with sturdy design & unique light distribution delivers both quality lighting with energy efficiency & longevity.

- Light output: Up to 149,232Lm
- Efficacy: 105-115Lm/W
- IP66 Rating
- Thermal rating: 50°C
- Remote LED driver
- Built in 10kV Surge protection (Optional 20kV Surge protection)



Product Applications

- General flood light applications
- Various sport fields
- Stadiums
- Sea port
- Rail yard
- Airport
- Wharfs
- Car parks
- Various public and commercial spaces
- And many more external lighting applications


- Unrivalled asymmetric distribution system
- High pressure cast Aluminium housing: Black finish
- Standard warranty: 5 years *
- Ease of installation & maintenance free
- Sturdy design to survive in adverse conditions





Main Features

Product Name:	Stealth Flood 1 (G3)
AC Input:	100-277 V AC , 50/60Hz (415 V optional)
CRI Range:	CRI 80 (CRI 70 -Optional)
CCT Range:	5000K (2700K, 3000K, 4000K optional)
Luminous flux:	107,344Lm (1000W) 133,217Lm (1200W) 149,232Lm (1400W)
Power options:	1000W to 1400W
Light distribution:	Asymmetric
Control system:	Dali, 1-10V dimming (optional)
Accessories:	Laser locator (optional)
Weight (excluding remote driver):	22.36kg (1000W), 32.25kg (1200W,1400W)

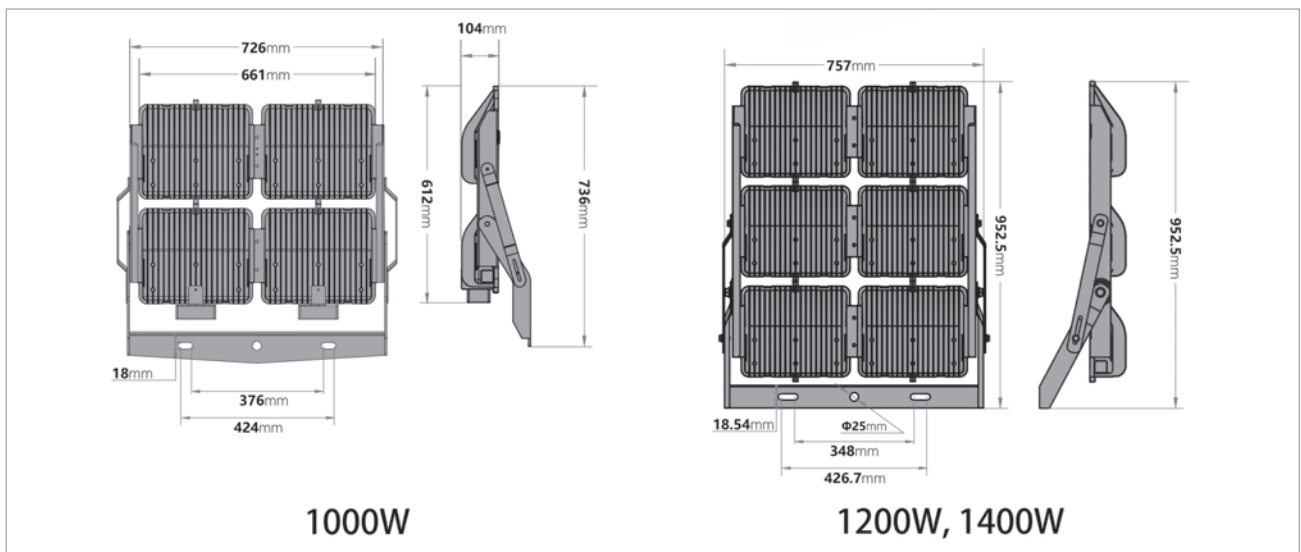

Stealth Flood Options

Stealth Flood is a one to one replacement for existing HID flood light with up to 65% energy savings.



Contact Us

LTC Head Office:

Sales: 1300 832 372

Email: sales@lighttc.com.au

Admin: 1300 832 372

Email: admin@lighttc.com.au

Website: www.lighttc.com.au



Address:

251 Rawson Street,
Auburn, NSW. 2144. Australia.