


Solar Batten Light







- 1: Push Button
- 2: USB Output

(*****)

3: Connector to External Switch

Light is ON with 30% power, and 100% when sensor is triggered

- 4: Motion (PIR) Sensor
- 5 : Solar Panel Input
- 6 : Adjustable Bracket
- 7: Solar Panel Brackets

Remote Control



(U) MANUAL switch ON/OFF, 100% full power

AUTOMATIC ON/OFF up dawn & dark, 100% full power (auto)

(÷ķ÷) Increase the brightness by 20%

(-;kj-) Decrease the brightness by 20%

Light is 0% (off power) turn ON when sensor is triggered (*****

Set light to work for 2 hours (2н)

Set light to work for 4 hours (4_H

Set light to work for 6 hours (6н)




owned and operated.



Main Features

Item Code	112068	112069
Model	LFA-S360	LFA-S600
Material	PC + Aluminium	PC + Aluminium
LED Peak Power	12W	24W
Luminous Flux (Im)	1,500lm	2,400lm
Light Color	6000K	6000K
Beam Angle	120°	120°
Battery Capacity	3.7V 12AH	3.7V 24AH
Solar Panel	10W 6V	18W 6V
USB Output	5V 2.5A	5V 2.5A
Cable Length	5m	5m
Switch Cable	4m	4m
IP Rate	IP65	IP65

Warranty

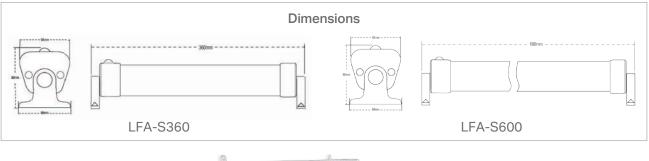

Vandal proof cage (optional)



Solar Power Batten Light





LTC Head Office:

Sales: 1300 832 372 Email: sales@lighttc.com.au

Admin: 1300 832 372 Email: admin@lighttc.com.au

Website: www.lighttc.com.au





Address: 251 Rawson Street, Auburn, NSW 2144, Australia

2 Years